


**Proven performance since 2010 - Supports up to 6 LEED® credits
ECO-Certified Composite Certified - CARB Phase 2**

ANCHOR™ BOISE CASCADE FIXTURE GRADE is specially engineered for slatwall applications and the store fixture market. It carries industry leading internal bond (IB), along with a light and consistent color that laminates seamlessly. ANCHOR™ is made from 100% recycled fiber** and available FSC® certified. Extensive testing determines **ANCHOR™ is up to 50% stronger than premium MDF in slatwall applications.**

Conforms to American Society of Testing and Materials Fire Test Method E-84 (flamespread rating is Class C). Canadian Standard CAN/ULC-S102-M

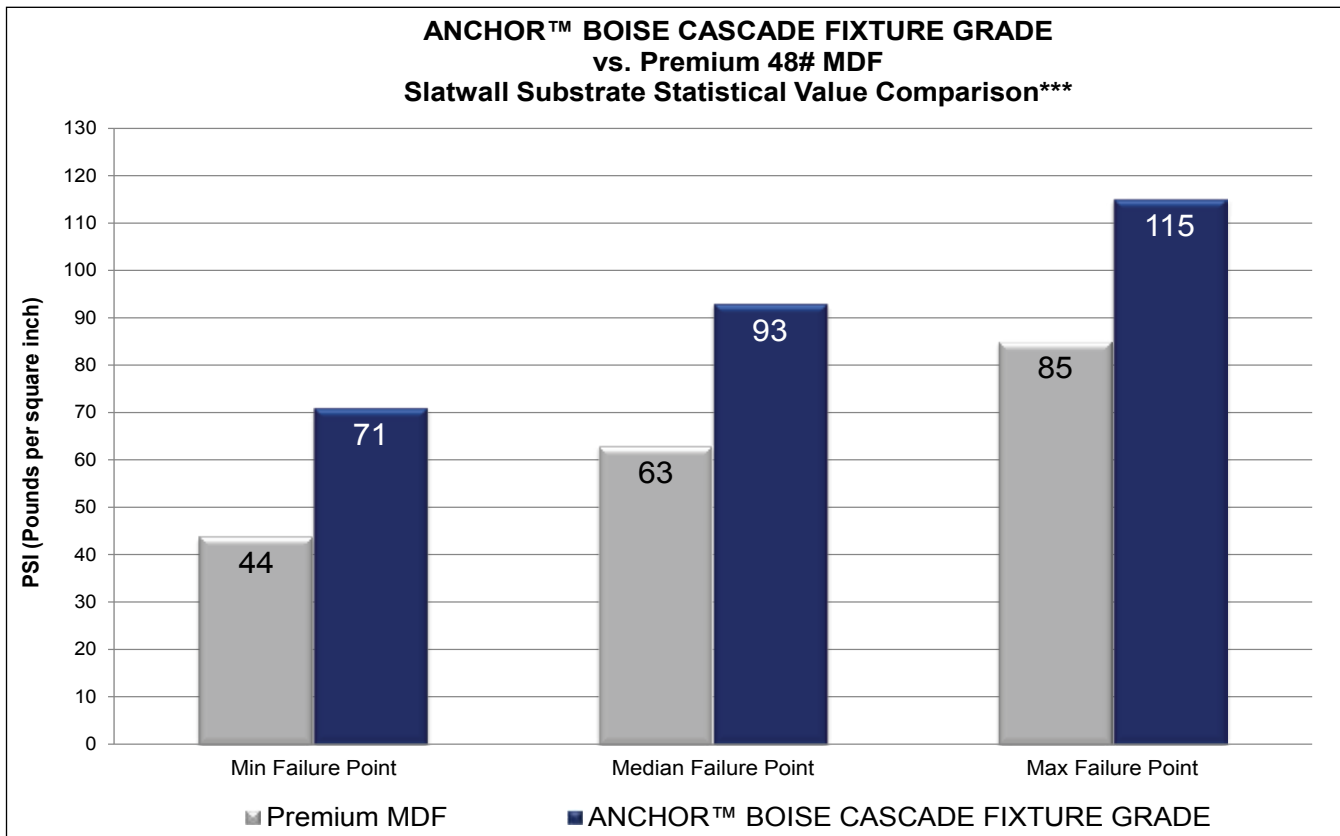

MANUFACTURING TOLERANCES	IMPERIAL	METRIC
Thickness Average from Target Value* <i>*Target value 0.005 under nominal</i>	±0.005 inches	±0.127 mm
Thickness Range (within panel) from Panel Average Value	±0.004 inches	±0.1016 mm
Length and Width (within panel) from Specified Size	±0.0625 inches	±1.5875 mm
Squareness (within panel) Maximum Deviation Between Diagonal Measurements	0.125 inches	3.175 mm
Straightness (within panel) Maximum Bow per 8' Length	0.0625 inches	1.5875 mm

**100% recycled fiber refers to ECO-Certified Composite (ECC) Sustainability Standard CPA 4-11 - Oct 2011

*** 2 inch slatwall bracket offset by 3 inch

Slatwall is typically made from a 3/4" panel, where there is a 1/4" lip, a 1/4" T, and a 1/4" back. If T is cut too deep, breakout may occur when fastened to wall.